


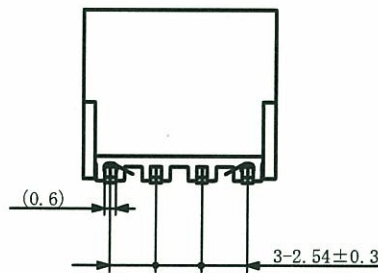
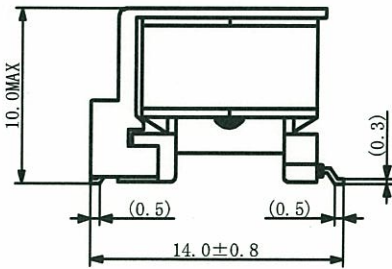


MECHANICAL DIMENSIONS



UNIT : mm

SCHEMATIC



Turns Ratio
Np : Ns = 1 : 1

UL File No. : E117865
Creepage distances : 5.0mm
Working Voltage Urms = 240V
Overvoltage category : III
Pollution degree : II
Insulation material group : IIIb

ELECTRICAL SPECIFICATIONS

Parameter	Pins Under Test	Test Conditions	STD TOLERANCE
Breakdown Voltage	1 : 8	Vac 3600 Vrms 2sec	
Inductance	1 - 4	10kHz 0.1V	≧ 0.98mH
Leakage Inductance	1 - 4 (8-5 SHORT)	1MHz 0.1V	≦ 1.0 μH
Interwinding Capacitance	1 - 8	10kHz 0.1V	≦ 30pF
DC Resistance	1 - 4	T=25°C	0.22 Ω MAX
	8 - 5		0.25 Ω MAX